




HOT ROLLED AND STRUCTURAL STEEL PRODUCTS

FIFTH EDITION

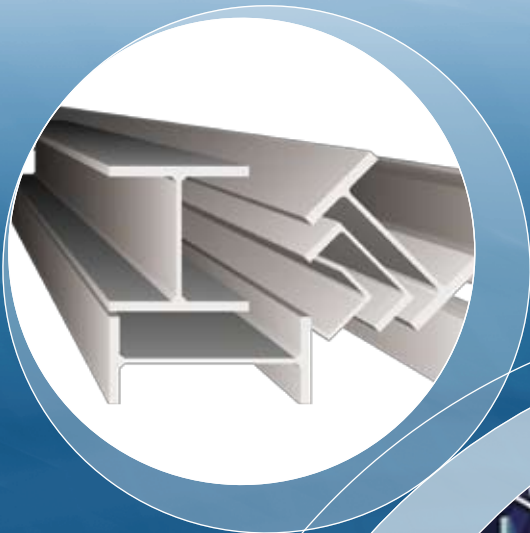

HOT ROLLED AND STRUCTURAL STEEL PRODUCTS

CONTENTS

Introduction	1
Availability	
Structural Steel Sections	1
Merchant Bar Sections	3
Dimensions and Design Information	
Welded Beams	5
Welded Columns	7
Universal Beams	9
Universal Columns	11
Tapered Flange Beams	13
Parallel Flange Channels	14
Universal Bearing Piles	15
Equal Angles	16
Unequal Angles	19
Standard Specifications	
Structural Steel Sections	22
Merchant Bar Sections	24
Customer Technical Service	25

INTRODUCTION

OneSteel is a fully integrated, global manufacturer and distributor of steel and finished steel products, self-sufficient in both iron ore and scrap metal.

OneSteel's major manufacturing facilities are located in Whyalla, South Australia, Melbourne, Victoria, Western Sydney and Newcastle, New South Wales and Brisbane, Queensland.

This booklet is produced by OneSteel Market Mills and is intended to provide general information on a range of hot rolled and structural steel products. The following text will refer to OneSteel Market Mills as OneSteel.

AVAILABILITY

Structural Steel Sections

Hot Rolled Products

Hot Rolled Structural Steel sections produced by OneSteel are manufactured in accordance with the requirements of Australian Standard AS/NZS 3679.1:1996 Structural Steel - Hot Rolled Bars and Sections.

Grade Availability

300PLUS® Steel is the standard grade manufactured by OneSteel for hot rolled Structural Steel Sections for Australia.

300PLUS® Steel for hot rolled products is produced to exceed the minimum requirements of AS/NZS 3679.1:1996 grade 300.

In New Zealand, 300PLUS®SO is the standard grade for the range of universal beams and columns shown in Table 1.

Table 1
Standard 300PLUS®SO Grade sections in New Zealand

Universal Beams	Universal Columns
610UB125	310UC158
610UB113	310UC137
610UB101	310UC118
530UB92.4	310UC96.8
530UB82.0	250UC89.5
460UB82.1	250UC72.9
460UB74.6	200UC59.5
460UB67.1	200UC52.2
410UB59.7	200UC46.2
410UB53.7	
360UB56.7	
360UB50.7	
360UB44.7	

Other grades including 300PLUSLO, AS/NZS 3679.1-350 and AS/NZS 3679.1-350LO may also be available depending on the section and quantity required. For further information contact your nearest OneSteel Sales Office (contact details on page 26) .

Length Availability

The majority of Structural Steel Sections produced by OneSteel are available in standard length and bundle configurations. We would recommend that attention be given to the standard lengths produced by OneSteel as they are more readily available than other lengths. Table 2 indicates the standard lengths produced by OneSteel in Structural Steel Sections. For other lengths (including those in excess of 18 metres) please contact your nearest OneSteel Sales Office for further details (contact details on page 26).

Welded Products

OneSteel Market Mills also markets a range of large Welded Product Structural Steel sections. These sections are welded from plate and are manufactured in accordance with Australian Standard AS/NZS 3679.2:1996 Structural Steel - Welded I Sections.

Grade Availability

300PLUS® Steel is the standard grade manufactured for Welded Products. 300PLUS® welded products are produced to exceed the minimum requirements of AS/NZS 3679.2:1996 grade 300.

A higher grade option of AS/NZS 3679.2:1996 grade 400 is also available.

Other grades are subject to enquiry and this should be directed to your nearest OneSteel Sales Office.

Length Availability

Lengths are available from a minimum of 6 metres to a maximum of 30 metres. Table 2 indicates the standard lengths produced.



AVAILABILITY

Table 2 Standard Lengths

Section	Length (m)								
	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0	20.0*
Welded Sections									
1200 WB, 1000 WB, 900 WB, 800 WB, 700 WB		●	●	●	●	●	●	●	
500 WC, 400 WC, 350 WC		●	●	●	●	●	●	●	
Universal Beams									
610 UB, 530 UB, 460 UB, 410 UB, 360 UB		●	●	●	●	●	●	●	●
310 UB 46.2, 40.4		●	●	●	●	●	●	●	●
310 UB 32.0		●	●	●	●	●		●	
250 UB		●	●	●	●	●	●	●	
200 UB 29.8, 25.4, 22.3		●	●	●	●	●	●	●	
200 UB 18.2		●	●	●	●	●			
180 UB, 150 UB		●	●	●	●	●	●		
Universal Columns									
310 UC 158, 137, 118		●	●	●	●	●	●	●	
310 UC 96.8		●	●	●	●	●	●	●	●
250 UC		●	●	●	●	●	●	●	●
200 UC, 150 UC		●	●	●	●	●	●	●	
100 UC		●		●		●			
Taper Flange Beams									
125 TFB, 100 TFB		●		●					
Parallel Flange Channels									
380 PFC, 300 PFC		●	●	●	●	●	●	●	
250 PFC		●	●	●	●	●	●	●	
230 PFC, 200 PFC, 180 PFC, 150 PFC		●	●	●	●	●	●	●	
125 PFC, 100 PFC, 75 PFC		●		●					
Universal Bearing Piles									
310 UBP 149, 110 [†]									
310 UBP 78.8			●	●	●	●	●	●	●
200 UBP 122		●			●				
Equal Angles									
200 EA, 150 EA, 125 EA		●	●	●	●	●			
100 EA, 90 EA, 75 EA		●		●					
65 EA, 55 EA, 50 EA, 45 EA, 40 EA **	●	●							
30 EA, 25 EA	●								
Unequal Angles									
150 x 100 UA, 150 x 90 UA		●	●	●	●	●			
125 x 75 UA, 100 x 75 UA		●		●					
75 x 50 UA	●	●							
65 x 50 UA		●							

● The Section/Length combination is available in Standard Bundle configurations

* By enquiry - Delivery to Capital cities only

** Certain thicknesses may not be available in both lengths. Confirm availability with a OneSteel Market Mills Sales Office.

† By enquiry

Merchant Bar Sections

Rounds, Squares and Flats

Availability

Merchant bar rounds, squares and flats are available in a variety of steel grades and sizes.

Due to process limitations not all grades are available in all sizes. For new applications we recommend you confirm product availability with a OneSteel Sales Office at an early stage of design. Other specifications and sizes may also be available on enquiry.

Specifications

Merchant bar sections are available in the following standards:

- 300PLUS® and AS/NZS 3679.1 - Structural Steel - Hot Rolled Bars and Sections.
- AS 1442 - Carbon Steels and Carbon Manganese Steels - Hot Rolled Bars and Semifinished Products.
- AS 1444 - Wrought Alloy Steels Standard, Hardenability (H) Series and Hardened and Tempered to Designated Mechanical Properties.
- AS 1447 - Hot-Rolled Spring Steels.
- OneSteel grades (based on AISI-SAE nomenclature).

Table 3 Rounds - Size Availability and Mass

Diameter (mm)	Mass (kg/m)
10	0.616
12	0.887
13	1.04
14	1.21
15	1.39
16	1.58
17	1.78
18	1.99
19	2.23
20	2.46
22	2.98
24	3.55
27	4.49
30	5.55
33	6.71
36	7.99
39	9.38
42	10.9
45	12.5
48	14.2
50	15.4
56	19.3
60	22.2
65	26.0
75	34.7
90	49.9

Standard Length: 6 Metres

Table 4 Squares - Size Availability and Mass

Thickness (mm)	Mass (kg/m)
10*	0.790
12	1.13
16	2.01
20	3.14
25	4.91
40	12.5

Standard Length: 6 Metres

* Confirm availability with sales office.

Table 5 Flats – Size Availability and Mass (kg/m)

Width (mm)	Thickness (mm)							
	5	6	8	10	12	16	20	25
20				1.57				
25	0.981	1.18	1.57	1.96	2.36			
32	1.26	1.51	2.01	2.51	3.01			
40	1.57	1.88	2.51	3.14	3.77	5.02	6.28	
50	1.96	2.36	3.14	3.93	4.71	6.28	7.85	9.81
65	2.55	3.06	4.08	5.10	6.12	8.16	10.2	
75	2.94	3.53	4.71	5.89	7.07	9.42	11.8	14.7
90		4.24	5.65	7.07	8.48			
100	3.93	4.71	6.28	7.85	9.42	12.6	15.7	19.6
110		5.18	6.91	8.64	10.4			
130	5.10	6.12	8.16	10.2	12.2	16.3	20.4	25.5
150	5.89	7.07	9.42	11.8	14.1	18.8	23.6	29.4
180		8.48		14.1	17.0			
200		9.42	12.6	15.7	18.8			
250		11.8	15.7	19.6	23.6			
300		14.1	18.8	23.6	28.3			

Standard Length: 6 Metres

Table 6 Merchant Bar Sections - Regular Grades

Steel Type	Standard	Grades Available
Structural Steels	OneSteel	300PLUS
	AS/NZS 3679.1	350
Carbon and Carbon-Manganese Steels	AS 1442	1016
		1022
		1045
Spring Steels	AS 1447	XK5160S XK9258S XK9261S
OneSteel Grades	OneSteel	1015 X4K92M61S

Note

Grade availability can vary with section.

Rods and Light Billets

Rods and light billets are available in a wide range of OneSteel grades, and selected grades from AS 1442, AS 1444 and AS 1447 specifications.

These sections are not available in structural grades 300PLUS® or 350.

Due to process limitations not all grades are available in all sizes.

Confirm product availability with a OneSteel Sales Office at an early stage of design.

Table 7 Rods Size Availability

Diameter (mm)													
5.5	6.5	7.0	8.0	9.0	10.0	11.2	12.5	13.0	14.0	15.0	16.0	17.0	18.0

Table 8 Light Billets Size Availability

Sizes Available mm x mm
45 x 45
50 x 50
63 x 63
75 x 75



Welded Beams

Table 9 Welded Beams - Dimensions and Properties

Designation	Depth of Section	Flange		Web		Depth Between Flanges		Gross Area of Cross Section		About x-axis				About y-axis				Torsion Constant	Warping Constant	Designation	
		Width	Thickness	Thickness	t_w	d_1	d_2	d_1	t_w	$(b_f t_f)$	A_g	I_x	Z_x	S_x	r_x	I_y	Z_y				S_y
kg/m	mm	mm	mm	mm	mm	mm	mm	mm	mm ²	10 ⁶ mm ⁴	10 ⁶ mm ³	10 ⁶ mm ³	10 ⁶ mm ³	mm	10 ⁶ mm ⁴	10 ⁶ mm ³	10 ⁶ mm ³	mm	10 ⁶ mm ⁴	10 ⁹ mm ⁶	
1200 WB 455	1200	500	40	16	120	120	70.0	6.05	57900	15300	25600	28200	28200	515	834	3330	5070	120	22000	2800000	1200 WB 455
423	1192	500	36	16	120	120	70.0	6.72	53900	13900	23300	25800	25800	508	750	3000	4570	118	16500	2510000	423
392	1184	500	32	16	120	120	70.0	7.56	49900	12500	2100	23400	23400	500	667	2670	4070	116	12100	2210000	392
342	1184	400	32	16	120	120	70.0	6.00	43500	10400	17500	19800	19800	488	342	1710	2630	88.6	9960	1130000	342
317	1176	400	28	16	120	120	70.0	6.86	40300	9250	15700	17900	17900	479	299	1500	2310	86.1	7230	985000	317
278	1170	350	25	16	120	120	70.0	6.68	35400	7610	13000	15000	15000	464	179	1020	1600	71.1	5090	587000	278
249	1170	275	25	16	120	120	70.0	5.18	31700	6380	10900	12900	12900	449	87.0	633	1020	52.4	4310	285000	249
1000 WB 322	1024	400	32	16	960	960	60.0	6.00	41000	7480	14600	16400	16400	427	342	1710	2620	91.3	9740	841000	1000 WB 322
296	1016	400	28	16	960	960	60.0	6.86	37800	6650	13100	14800	14800	420	299	1490	2300	89.0	7010	730000	296
258	1010	350	25	16	960	960	60.0	6.68	32900	5430	10700	12300	12300	406	179	1020	1590	73.8	4870	434000	258
215	1000	300	20	16	960	960	60.0	7.10	27400	4060	8120	9570	9570	385	90.3	602	961	57.5	2890	217000	215
900 WB 282	924	400	32	12	860	860	71.7	6.06	35900	5730	12400	13600	13600	399	341	1710	2590	97.5	8870	679000	900 WB 282
257	916	400	28	12	860	860	71.7	6.93	32700	5050	11000	12200	12200	393	299	1490	2270	95.6	6150	589000	257
218	910	350	25	12	860	860	71.7	6.76	27800	4060	8930	9960	9960	382	179	1020	1560	80.2	4020	350000	218
175	900	300	20	12	860	860	71.7	7.20	22300	2960	6580	7500	7500	364	90.1	601	931	63.5	2060	174000	175
800 WB 192	816	300	28	10	760	760	76.0	5.18	24400	2970	7290	8060	8060	349	126	840	1280	71.9	4420	196000	800 WB 192
168	810	275	25	10	760	760	76.0	5.30	21400	2480	6140	6840	6840	341	86.7	631	964	63.7	2990	134000	168
146	800	275	20	10	760	760	76.0	6.63	18600	2040	5100	5730	5730	331	69.4	505	775	61.1	1670	106000	146
122	792	250	16	10	760	760	76.0	7.50	15600	1570	3970	4550	4550	317	41.7	334	519	51.7	921	62800	122
700 WB 173	716	275	28	10	660	660	66.0	4.73	22000	2060	5760	6390	6390	306	97.1	706	1080	66.4	4020	115000	700 WB 173
150	710	250	25	10	660	660	66.0	4.80	19100	1710	4810	5370	5370	299	65.2	521	798	58.4	2690	76400	150
130	700	250	20	10	660	660	66.0	6.00	16600	1400	3990	4490	4490	290	52.1	417	642	56.0	1510	60300	130
115	692	250	16	10	660	660	66.0	7.50	14600	1150	3330	3790	3790	281	41.7	334	516	53.5	888	47700	115

Notes

- All welds to AS/NZS 1554.1 Category SP (deep penetration).
- Web to flange joints develop the minimum tensile strength of the web.
- Flame cut surfaces not incorporated in welds have a minimum surface roughness of class 2, as defined in WTIA Technical Note 5.



Welded Beams


Table 10 Welded Beams - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor		About x-axis		About y-axis		Yield Stress		Form Factor		About x-axis		About y-axis		Designation
	Flange f_y MPa	Web f_y MPa	k_f	k_l	Compactness	Z_{ex} 10^3mm^3	Compactness	Z_{ey} 10^3mm^3	Flange f_y MPa	Web f_y MPa	k_f	k_l	Compactness	Z_{ex} 10^3mm^3	Compactness	Z_{ey} 10^3mm^3	
300PLUS® *																	
1200 WB 455	280	300	0.837	C	28200	C	5000	C	360	380	0.820	N	2800	C	5000	1200 WB 455	
423	280	300	0.825	C	25800	C	4500	C	360	380	0.806	N	25700	N	4500	423	
392	280	300	0.811	C	23400	N	4000	N	360	380	0.791	N	23300	N	3900	392	
342	280	300	0.783	C	19800	C	2560	C	360	380	0.760	N	19600	C	2560	342	
317	280	300	0.766	C	17900	C	2240	C	360	380	0.741	N	17700	N	2230	317	
278	280	300	0.733	C	15000	C	1530	C	360	380	0.705	N	14900	N	1530	278	
249	280	300	0.701	C	12900	C	949	C	360	380	0.670	N	12800	C	949	249	
AS/NZS 3679.2-400																	
1000 WB 322	280	300	0.832	C	16400	C	2560	C	360	380	0.807	C	16400	C	2560	1000 WB 322	
296	280	300	0.817	C	14800	C	2240	C	360	380	0.791	C	14800	N	2230	296	
258	280	300	0.790	C	12300	C	1530	C	360	380	0.760	C	12300	C	1530	258	
215	300	300	0.738	C	9570	C	903	C	380	380	0.704	C	9570	N	887	215	
900 WB 282	280	310	0.845	C	13600	C	2560	C	360	400	0.830	N	13500	C	2560	900 WB 282	
257	280	310	0.830	C	12200	C	2240	C	360	400	0.813	N	12000	N	2220	257	
218	280	310	0.800	C	9960	C	1530	C	360	400	0.780	N	9840	N	1530	218	
175	300	310	0.744	C	7500	C	901	C	380	400	0.721	N	7320	N	882	175	
800 WB 192	280	310	0.824	C	8060	C	1260	C	360	400	0.808	N	7850	C	1260	800 WB 192	
168	280	310	0.799	C	6840	C	946	C	360	400	0.781	N	6640	C	946	168	
146	300	310	0.763	N	5710	C	757	C	380	400	0.744	N	5510	N	754	146	
122	300	310	0.718	N	4530	N	498	N	380	400	0.695	N	4340	N	486	122	
700 WB 173	280	310	0.850	C	6390	C	1060	C	360	400	0.833	C	6390	C	1060	700 WB 173	
150	280	310	0.828	C	5370	C	782	C	360	400	0.807	C	5370	C	782	150	
130	300	310	0.795	C	4490	C	626	C	380	400	0.773	C	4490	C	626	130	
115	300	310	0.767	C	3790	C	498	N	380	400	0.742	C	3790	N	486	115	

* 300PLUS® welded sections are produced to exceed the minimum requirements of AS/NZS 3679.2:300.

Notes

1. For 300PLUS® sections the tensile strength (f_t) is 430 MPa.
2. For Grade 400 sections the tensile strength (f_t) is 480 MPa.
3. C: Compact Section; N: Non-compact Section; S: Slender Section.

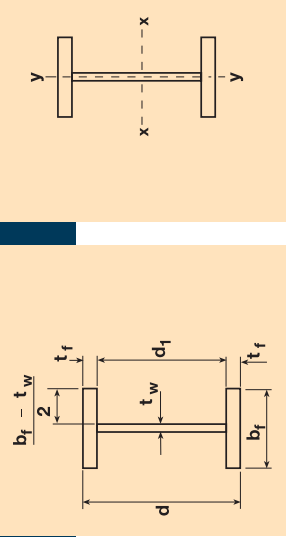



Welded Columns

Table 11 Welded Columns - Dimensions and Properties

Designation	Depth of Section	Flange		Web Thickness	Depth Between Flanges	Gross Area of Cross Section		About x-axis			About y-axis			Torsion Constant	Warping Constant	Designation					
		Width	Thickness			A_g	A_w	Z_x	Z_y	S_x	S_y	r_x	r_y				J	I_w			
kg/m	mm	b_f	t_f	t_w	d_f	d_f	$(b_f t_f)$	d_f	t_w	$2t_f$	I_x	Z_x	S_x	r_x	I_y	Z_y	S_y	r_y	J	I_w	
500 WC 440	480	500	40	40	400	400	5.75	10.0	5.75	56000	2150	8980	10400	196	835	3340	5160	122	30100	40400	500 WC 440
414	480	500	40	32	400	400	5.85	12.5	5.85	52800	2110	8800	10100	200	834	3340	5100	126	25400	40400	414
383	472	500	36	32	400	400	6.50	12.5	6.50	48800	1890	7990	9130	197	751	3000	4600	124	19900	35700	383
340	514	500	32	25	450	450	7.42	18.0	7.42	43200	2050	7980	8980	218	667	2670	4070	124	13100	38800	340
290	506	500	28	20	450	450	8.57	22.5	8.57	37000	1750	6930	7700	218	584	2330	3540	126	8420	33300	290
267	500	500	25	20	450	450	9.60	22.5	9.60	34000	1560	6250	6950	214	521	2080	3170	124	6370	29400	267
228	490	500	20	20	450	450	12.0	22.5	12.0	29000	1260	5130	5710	208	417	1670	2540	120	3880	23000	228
400 WC 361	430	400	40	40	350	350	4.50	8.75	4.50	46000	1360	6340	7460	172	429	2140	3340	96.5	24800	16300	400 WC 361
328	430	400	40	28	350	350	4.65	12.5	4.65	41800	1320	6140	7100	178	427	2140	3270	101	19200	16200	328
303	422	400	36	28	350	350	5.17	12.5	5.17	38600	1180	5570	6420	175	385	1920	2950	99.8	14800	14300	303
270	414	400	32	25	350	350	5.86	14.0	5.86	34400	1030	4950	5660	173	342	1710	2610	99.8	10400	12500	270
212	400	400	25	20	350	350	7.60	17.5	7.60	27000	776	3880	4360	169	267	1330	2040	99.4	5060	9380	212
181	390	400	20	20	350	350	9.50	17.5	9.50	23000	620	3180	3570	164	214	1070	1640	96.4	3080	7310	181
144	382	400	16	16	350	350	12.0	21.9	12.0	18400	486	2550	2830	163	171	854	1300	96.3	1580	5720	144
350 WC 280	355	350	40	28	275	275	4.03	9.82	4.03	35700	747	4210	4940	145	286	1640	2500	89.6	16500	7100	350 WC 280
258	347	350	36	28	275	275	4.47	9.82	4.47	32900	661	3810	4450	142	258	1470	2260	88.5	12700	6230	258
230	339	350	32	25	275	275	5.08	11.0	5.08	29300	573	3380	3910	140	229	1310	2000	88.4	8960	5400	230
197	331	350	28	20	275	275	5.89	13.8	5.89	25100	486	2940	3350	139	200	1140	1740	89.3	5750	4600	197

Notes

- All welds to AS/NZS 1554.1 Category SP (deep penetration).
- Web to flange joints develop the minimum tensile strength of a 16mm web only.
- Flame cut surfaces not incorporated in welds have a minimum surface roughness of class 2, as defined in WTIA Technical Note 5.



Welded Columns


Table 12 Welded Columns - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor		About x-axis		About y-axis		Yield Stress		Form Factor		About x-axis		About y-axis		Designation		
	Flange f_y MPa	Web f_y MPa	k_f	Compactness	Z_{ex} 10^3mm^3	Compactness	Z_{ey} 10^3mm^3	Flange f_y MPa	Web f_y MPa	k_f	Compactness	Z_{ex} 10^3mm^3	Compactness	Z_{ey} 10^3mm^3					
															MPa	MPa		MPa	MPa
300PLUS® *																			
500 WC 440	280	280	1.00	C	10400	C	5010	360	360	1.00	C	10400	C	5010	360	360	1.00	C	500 WC 440
414	280	280	1.00	C	10100	C	5010	360	360	1.00	C	10100	C	5010	360	360	1.00	C	414
383	280	280	1.00	C	9130	C	4510	360	360	1.00	C	9130	C	4510	360	360	1.00	C	383
340	280	280	1.00	C	8980	C	4000	360	360	1.00	N	8830	N	3920	360	360	1.00	N	340
290	280	300	1.00	N	7570	N	3410	360	380	1.00	N	7410	N	3310	360	380	1.00	N	290
267	280	300	1.00	N	6700	N	2970	360	380	1.00	N	6540	N	2860	360	380	1.00	N	267
228	300	300	1.00	N	5210	N	2200	380	380	0.964	S	4860	S	2100	380	380	0.964	S	228
AS/NZS 3679.2-400																			
400 WC 361	280	280	1.00	C	7470	C	3210	360	360	1.00	C	7470	C	3210	360	360	1.00	C	400 WC 361
328	280	280	1.00	C	7100	C	3200	360	360	1.00	C	7100	C	3200	360	360	1.00	C	328
303	280	280	1.00	C	6420	C	2880	360	360	1.00	C	6420	C	2880	360	360	1.00	C	303
270	280	280	1.00	C	5660	C	2560	360	360	1.00	C	5660	C	2560	360	360	1.00	C	270
212	280	300	1.00	N	4360	N	2000	360	380	1.00	N	4270	N	1950	360	380	1.00	N	212
181	300	300	1.00	N	3410	N	1510	380	380	1.00	N	3330	N	1460	380	380	1.00	N	181
144	300	300	1.00	N	2590	N	1120	380	380	0.964	S	2410	S	1070	380	380	0.964	S	144
350 WC 280																			
258	280	280	1.00	C	4940	C	2450	360	360	1.00	C	4940	C	2450	360	360	1.00	C	350 WC 280
230	280	280	1.00	C	4450	C	2210	360	360	1.00	C	4450	C	2210	360	360	1.00	C	258
400 WC 230																			
197	280	280	1.00	C	3910	C	1960	360	360	1.00	C	3910	C	1960	360	360	1.00	C	400 WC 230
400 WC 197																			
1720	280	300	1.00	C	3350	C	1720	360	380	1.00	C	3350	C	1720	360	380	1.00	C	400 WC 197

* 300PLUS® welded sections are produced to exceed the minimum requirements of AS/NZS 3679.2:300.

Notes



1. For 300PLUS® sections the tensile strength (f_t) is 430 MPa.
2. For Grade 400 sections the tensile strength (f_t) is 480 MPa.
3. C: Compact Section; N: Non-compact Section; S: Slender Section.

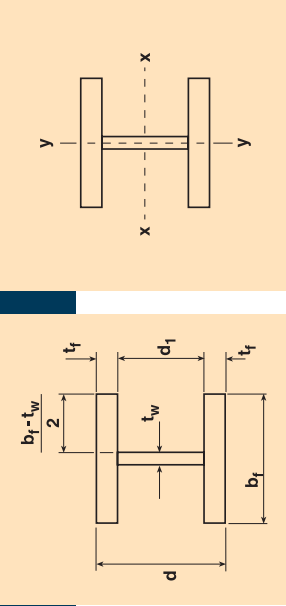

Universal Beams

Table 13 Universal Beams - Dimensions and Properties

Designation	Depth of Section	Flange		Web Thickness	Root Radius	Depth Between Flanges	Gross Area of Cross Section		About x-axis			About y-axis			Torsion Constant	Warping Constant	Designation			
		Width	Thickness				d_1	t_w	$2t_f$	$(b_f - t_w)$	A_g	A_g	I_x	Z_x				S_x	r_x	I_y
610 UB 125	612	229	19.6	11.9	14.0	572	48.1	5.54	16000	986	3230	3680	249	39.3	343	536	49.6	1560	3450	610 UB 125
113	607	228	17.3	11.2	14.0	572	51.1	6.27	14500	875	2880	3290	246	34.3	300	469	48.7	1140	2980	113
101	602	228	14.8	10.6	14.0	572	54.0	7.34	13000	761	2530	2900	242	29.3	257	402	47.5	790	2530	101
530 UB 92.4	533	209	15.6	10.2	14.0	502	49.2	6.37	11800	554	2080	2370	217	23.8	228	355	44.9	775	1590	530 UB 92.4
82.0	528	209	13.2	9.6	14.0	502	52.3	7.55	10500	477	1810	2070	213	20.1	193	301	43.8	526	1330	82.0
460 UB 82.1	460	191	16.0	9.9	11.4	428	43.3	5.66	10500	372	1610	1840	188	18.6	195	303	42.2	701	919	460 UB 82.1
74.6	457	190	14.5	9.1	11.4	428	47.1	6.24	9520	335	1460	1660	188	16.6	175	271	41.8	530	815	74.6
67.1	454	190	12.7	8.5	11.4	428	50.4	7.15	8580	296	1300	1480	186	14.5	153	238	41.2	378	708	67.1
410 UB 59.7	406	178	12.8	7.8	11.4	381	48.8	6.65	7640	216	1060	1200	168	12.1	135	209	39.7	337	467	410 UB 59.7
53.7	403	178	10.9	7.6	11.4	381	50.1	7.82	6890	188	933	1060	165	10.3	115	179	38.6	234	394	53.7
360 UB 56.7	359	172	13.0	8.0	11.4	333	41.6	6.31	7240	161	899	1010	149	11.0	128	198	39.0	338	330	360 UB 56.7
50.7	356	171	11.5	7.3	11.4	333	45.6	7.12	6470	142	798	897	148	9.60	112	173	38.5	241	284	50.7
44.7	352	171	9.7	6.9	11.4	333	48.2	8.46	5720	121	689	777	146	8.10	94.7	146	37.6	161	237	44.7
310 UB 46.2	307	166	11.8	6.7	11.4	284	42.3	6.75	5930	100	654	729	130	9.01	109	166	39.0	233	197	310 UB 46.2
40.4	304	165	10.2	6.1	11.4	284	46.5	7.79	5210	86.4	569	633	129	7.65	92.7	142	38.3	157	165	40.4
32.0	298	149	8.0	5.5	13.0	282	51.3	8.97	4080	63.2	424	475	124	4.42	59.3	91.8	32.9	86.5	92.9	32.0
250 UB 37.3	256	146	10.9	6.4	8.9	234	36.6	6.40	4750	55.7	435	486	108	5.66	77.5	119	34.5	158	85.2	250 UB 37.3
31.4	252	146	8.6	6.1	8.9	234	38.4	8.13	4010	44.5	354	397	105	4.47	61.2	94.2	33.4	89.3	65.9	31.4
25.7	248	124	8.0	5.0	12.0	232	46.4	7.44	3270	35.4	285	319	104	2.55	41.1	63.6	27.9	67.4	36.7	25.7
200 UB 29.8	207	134	9.6	6.3	8.9	188	29.8	6.65	3820	291	281	316	87.3	3.86	57.5	88.4	31.8	105	37.6	200 UB 29.8
25.4	203	133	7.8	5.8	8.9	188	32.3	8.15	3230	23.6	232	260	85.4	3.06	46.1	70.9	30.8	62.7	29.2	25.4
22.3	202	133	7.0	5.0	8.9	188	37.5	9.14	2870	21.0	208	231	85.5	2.75	41.3	63.4	31.0	45.0	26.0	22.3
18.2	198	99	7.0	4.5	11.0	184	40.9	6.75	2320	15.8	160	180	82.6	1.14	23.0	35.7	22.1	38.6	10.4	18.2
180 UB 22.2	179	90	10.0	6.0	8.9	159	26.5	4.20	2820	15.3	171	195	73.6	1.22	27.1	42.3	20.8	81.6	8.71	180 UB 22.2
18.1	175	90	8.0	5.0	8.9	159	31.8	5.31	2300	12.1	139	157	72.6	0.975	21.7	33.7	20.6	44.8	6.80	18.1
16.1	173	90	7.0	4.5	8.9	159	35.3	6.11	2040	10.6	123	138	72.0	0.853	19.0	29.4	20.4	31.5	5.88	16.1
150 UB 18.0	155	75	9.5	6.0	8.0	136	22.7	3.63	2300	9.05	117	135	62.8	0.672	17.9	28.2	17.1	60.5	3.56	150 UB 18.0
14.0	150	75	7.0	5.0	8.0	136	27.2	5.00	1780	6.66	88.8	102	61.1	0.495	13.2	20.8	16.6	28.1	2.53	14.0



Universal Beams

Table 14 Universal Beams - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor	About x-axis		About y-axis		Designation
	Flange f_y	Web f_y		Compactness	Z_{ex}	Compactness	Z_{ey}	
	MPa	MPa	k_f	10^3mm^3		10^3mm^3		
300PLUS® *								
610 UB 125	280	300	0.950	C	3680	C	515	610 UB 125
113	280	300	0.926	C	3290	C	451	113
101	300	320	0.888	C	2900	C	386	101
530 UB 92.4	300	320	0.928	C	2370	C	342	530 UB 92.4
82.0	300	320	0.902	C	2070	C	289	82.0
460 UB 82.1	300	320	0.979	C	1840	C	292	460 UB 82.1
74.6	300	320	0.948	C	1660	C	262	74.6
67.1	300	320	0.922	C	1480	C	230	67.1
410 UB 59.7	300	320	0.938	C	1200	C	203	410 UB 59.7
53.7	320	320	0.913	C	1060	C	173	53.7
360 UB 56.7	300	320	0.996	C	1010	C	193	360 UB 56.7
50.7	300	320	0.963	C	897	C	168	50.7
44.7	320	320	0.930	N	770	N	140	44.7
310 UB 46.2	300	320	0.991	C	729	C	163	310 UB 46.2
40.4	320	320	0.952	C	633	C	139	40.4
32.0	320	320	0.915	N	467	N	86.9	32.0
250 UB 37.3	320	320	1.00	C	486	C	116	250 UB 37.3
31.4	320	320	1.00	N	395	N	91.4	31.4
25.7	320	320	0.949	C	319	C	61.7	25.7
200 UB 29.8	320	320	1.00	C	316	C	86.3	200 UB 29.8
25.4	320	320	1.00	N	259	N	68.8	25.4
22.3	320	320	1.00	N	227	N	60.3	22.3
18.2	320	320	0.990	C	180	C	34.4	18.2
180 UB 22.2	320	320	1.00	C	195	C	40.7	180 UB 22.2
18.1	320	320	1.00	C	157	C	32.5	18.1
16.1	320	320	1.00	C	138	C	28.4	16.1
150 UB 18.0	320	320	1.00	C	135	C	26.9	150 UB 18.0
14.0	320	320	1.00	C	102	C	19.8	14.0

* 300PLUS® replaced Grade 250 as the base grade for these sections in 1994.



300PLUS® hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:300.

Notes

1. For 300PLUS® sections the tensile strength (f_t) is 440 MPa.

2. For Grade 350 sections the tensile strength (f_t) is 480 MPa.



3. C: Compact Section; N: Non-compact Section; S: Slender Section.



Universal Columns

Table 15 Universal Columns - Dimensions and Properties

Designation	Depth of Section	Flange		Web Thickness	Root Radius	Depth Between Flanges	Gross Area of Cross Section		About x-axis				About y-axis				Torsion Constant	Warping Constant	Designation	
		Width	Thickness				d_1	t_f	t_w	$2t_f$	$(b_f \cdot t_f)$	A_g	Z_x	S_x	r_x	I_x				Z_y
310 UC 158	327	311	25.0	15.7	16.5	277	17.7	5.91	20100	388	2370	2680	139	125	807	1230	78.9	3810	2860	310 UC 158
137	321	309	21.7	13.8	16.5	277	20.1	6.80	17500	329	2050	2300	137	107	691	1050	78.2	2520	2390	137
118	315	307	18.7	11.9	16.5	277	23.3	7.89	15000	277	1760	1960	136	90.2	588	893	77.5	1630	1980	118
96.8	308	305	15.4	9.9	16.5	277	28.0	9.58	12400	223	1450	1600	134	72.9	478	725	76.7	928	1560	96.8
250 UC 89.5	260	256	17.3	10.5	14.0	225	21.5	7.10	11400	143	1100	1230	112	48.4	378	575	65.2	1040	713	250 UC 89.5
72.9	254	254	14.2	8.6	14.0	225	26.2	8.64	9320	114	897	992	111	38.8	306	463	64.5	586	557	72.9
200 UC 59.5	210	205	14.2	9.3	11.4	181	19.5	6.89	7620	61.3	584	656	89.7	20.4	199	303	51.7	477	195	200 UC 59.5
52.2	206	204	12.5	8.0	11.4	181	22.7	7.84	6660	52.8	512	570	89.1	17.7	174	264	51.5	325	166	52.2
46.2	203	203	11.0	7.3	11.4	181	24.8	8.90	5900	45.9	451	500	88.2	15.3	151	230	51.0	228	142	46.2
150 UC 37.2	162	154	11.5	8.1	8.9	139	17.1	6.34	4730	22.2	274	310	68.4	7.01	91.0	139	38.5	197	39.6	150 UC 37.2
30.0	158	153	9.4	6.6	8.9	139	21.0	7.79	3860	17.6	223	250	67.5	5.62	73.4	112	38.1	109	30.8	30.0
23.4	152	152	6.8	6.1	8.9	139	22.8	10.7	2980	12.6	166	184	65.1	3.98	52.4	80.2	36.6	50.2	21.1	23.4
100 UC 14.8	97	99	7.0	5.0	10.0	83.0	16.6	6.71	1890	3.18	65.6	74.4	41.1	1.14	22.9	35.2	24.5	34.9	2.30	100 UC 14.8



Universal Columns

Table 16 Universal Columns - Properties for Assessing Section Capacity


Designation	Yield Stress		Form Factor		About x-axis		About y-axis		Form Factor		About x-axis		About y-axis		Designation
	Flange f_y MPa	Web f_y MPa	k_f	k_f	Compactness	Z_{ex} 10^3mm^3	Compactness	Z_{ey} 10^3mm^3	Compactness	k_f	k_f	Compactness	Z_{ex} 10^3mm^3	Z_{ey} 10^3mm^3	
300PLUS* *															
310 UC 158	280	300	1.00	1.00	C	2680	C	1210	C	1.00	1.00	C	2680	1210	310 UC 158
137	280	300	1.00	1.00	C	2300	C	1040	C	1.00	1.00	C	2300	1040	137
118	280	300	1.00	1.00	C	1960	C	882	C	1.00	1.00	N	1950	878	118
96.8	300	320	1.00	1.00	N	1560	N	694	N	1.00	1.00	N	1550	684	96.8
250 UC 89.5	280	320	1.00	1.00	C	1230	C	567	C	1.00	1.00	C	1230	567	250 UC 89.5
72.9	300	320	1.00	1.00	N	986	N	454	N	1.00	1.00	N	977	448	72.9
200 UC 59.5	300	320	1.00	1.00	C	656	C	299	C	1.00	1.00	C	656	299	200 UC 59.5
52.2	300	320	1.00	1.00	C	570	C	260	C	1.00	1.00	N	569	260	52.2
46.2	300	320	1.00	1.00	N	494	N	223	N	1.00	1.00	N	490	219	46.2
150 UC 37.2	300	320	1.00	1.00	C	310	C	137	C	1.00	1.00	C	310	137	150 UC 37.2
30.0	320	320	1.00	1.00	C	250	C	110	C	1.00	1.00	N	248	109	30.0
23.4	320	320	1.00	1.00	N	176	N	73.5	N	1.00	1.00	N	174	72.3	23.4
100 UC 14.8	320	320	1.00	1.00	C	74.4	C	34.4	C	1.00	1.00	C	74.4	34.4	100 UC 14.8

* 300PLUS* replaced Grade 250 as the base grade for these sections in 1994.

300PLUS* hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:1-300.

Notes

1. For 300PLUS* sections the tensile strength (f_u) is 440 MPa.
2. For Grade 350 sections the tensile strength (f_u) is 480 MPa.
3. C: Compact Section; N: Non-compact Section; S: Slender Section.

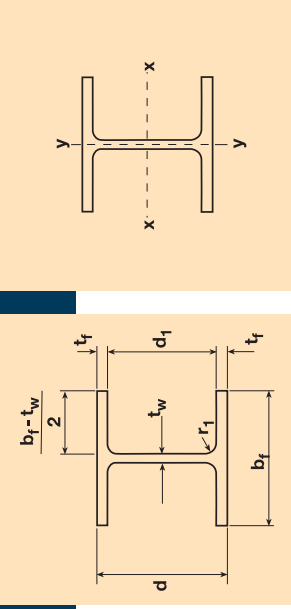

Tapered Flange Beams

Table 17 Tapered Flange Beams - Dimensions and Properties

Designation	Mass per metre	Depth of Section	Flange		Web Thickness	Radii		Depth Between Flanges	Gross Area of Section	About x-axis		About y-axis		Torsion Constant	Warping Constant	Designation			
			Width	Thickness		Root	Toe			Z_x	S_x	r_x	I_y				Z_y	S_y	r_y
d	mm	mm	b_f	t_f	t_w	r_1	r_2	d_f	A_g	I_x	Z_x	S_x	r_x	I_y	Z_y	S_y	r_y	J	I_w
125 TFB	13.1	125	65.0	8.5	5.0	8.0	4.0	108	1670	4.34	69.4	80.3	50.9	0.337	10.4	17.2	14.2	40.2	1.14
100 TFB	7.20	100	45.0	6.0	4.0	7.0	3.0	88	917	1.46	29.2	34.1	39.9	0.0795	3.53	6.00	9.31	11.6	0.176



Table 18 Tapered Flange Beams - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor	About x-axis		About y-axis	
	Flange f_y	Web f_y		Compactness	Z_{ex}	Compactness	Z_{ey}
MPa	MPa	MPa	k_f	10^3mm^3	10^3mm^3	10^3mm^3	10^3mm^3
125 TFB	320	320	1.00	C	80.3	C	15.6
100 TFB	320	320	1.00	C	34.1	C	5.30
300PLUS* *							
125 TFB	360	360	1.00	C	80.3	C	15.6
100 TFB	360	360	1.00	C	34.1	C	5.30

* 300PLUS* replaced Grade 250 as the base grade for these sections in 1997.
300PLUS* hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:1-300.

Notes

1. For 300PLUS* sections the tensile strength (f_u) is 430 MPa.
2. For Grade 350 sections the tensile strength (f_u) is 480 MPa.
3. C: Compact Section; N: Non-compact Section; S: Slender Section.



Universal Bearing Piles (refer Note 4)

Table 21 Universal Bearing Piles - Dimensions and Properties

Designation	Depth of Section	Flange		Web Thickness	Root Radius	Depth Between Flanges	Gross Area of Cross Section		About x-axis			About y-axis			Torsion Constant	Warping Constant	Designation			
		Width	Thickness				d_1	t_w	$2t_f$	A_g	$(b_f \cdot t_f)$	Z_x	S_x	I_x				Z_y	S_y	I_y
kg/m	d	mm	mm	mm	mm	mm	mm ²	mm ²	10 ⁶ mm ⁴	10 ³ mm ³	10 ³ mm ³	10 ⁶ mm ⁴	10 ³ mm ³	10 ³ mm ³	mm	mm	mm	10 ³ mm ⁴	10 ³ mm ⁶	
310 UBP 149	318	316	20.6	20.5	16.5	277	19000	7.14	330	2080	2370	132	109	691	75.8	2970	2410	2970	2410	310 UBP 149
110	308	311	15.4	15.3	16.5	277	14000	9.57	236	1530	1720	130	76.6	494	73.9	1240	1640	1240	1640	110
78.8	299	306	11.1	11.1	16.5	277	10100	13.3	165	1100	1220	128	53.1	347	72.5	484	1100	484	1100	78.8
200 UBP 122	230	220	25.0	25.0	11.4	180	15600	3.90	129	1120	1340	91.0	44.6	406	53.5	3540	469	3540	469	200 UBP 122




Table 22 Universal Bearing Piles - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor		About x-axis		About y-axis		Yield Stress		Form Factor		About x-axis		About y-axis		Designation
	Flange f_y	Web f_y	k_f	Compactness	Z_{ex}	Compactness	Z_{ey}	Compactness	Flange f_y	Web f_y	k_f	Compactness	Z_{ex}	Compactness	Z_{ey}		
	MPa	MPa			10 ³ mm ³		10 ³ mm ³		MPa	MPa			10 ³ mm ³		10 ³ mm ³		
310 UBP 149	280	280	1.00	C	2370	C	1040	C	340	340	1.00	C	2370	C	1040	310 UBP 149	
110	300	300	1.00	N	1680	N	718	N	340	340	1.00	N	1660	N	708	110	
78.8	300	300	1.00	N	1130	N	460	N	340	340	1.00	N	1110	N	450	78.8	
200 UBP 122	280	280	1.00	C	1340	C	609	C	340	340	1.00	C	1340	C	609	200 UBP 122	

* 300PLUS[®] hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:1300.

Notes



1. For 300PLUS[®] sections the tensile strength (f_t) is 440 MPa.
2. For Grade 350 sections the tensile strength (f_t) is 480 MPa.
3. C. Compact Section; N: Non-compact Section; S: Slender Section.
4. These sections are generally not stocked and are available for project orders only subject to enquiry from your nearest OneSteel Sales Office.



Equal Angles

Table 23 Equal Angles - x-axis and y-axis - Dimensions and Properties

Designation	Nominal Thickness mm	Mass per metre kg/m	Actual Thickness mm	Radii		Coordinate of Centroid			About x-axis				About y-axis				Torsion Constant	Designation				
				Root	Toe	Area of Section	n_x	n_y	r_x	r_y	Z_{x1}	Z_{x2}	Z_{y1}	Z_{y2}	S_x	S_y			I_x	I_y	x_3	x_5
200 x 200 x 26 EA	26.0	76.8	26.0	5.0	6.69	9780	59.3	141	56.8	141	402	643	76.2	14.9	73.9	202	83.8	178	329	390	2250	200 x 200 x 26 EA
20 EA	20.0	60.1	20.0	5.0	9.00	7660	57.0	143	45.7	141	323	511	77.2	11.8	72.9	162	80.6	147	260	39.3	1060	20 EA
18 EA	18.0	54.4	18.0	5.0	10.1	6930	56.2	144	41.7	141	295	464	77.6	10.8	72.6	149	79.5	136	236	39.4	778	18 EA
16 EA	16.0	48.7	16.0	5.0	11.5	6200	55.4	145	37.6	141	266	417	77.9	9.72	72.3	135	78.4	124	212	39.6	554	16 EA
13 EA	13.0	40.0	13.0	5.0	14.4	5090	54.2	146	31.2	141	221	344	78.3	8.08	71.9	112	76.6	105	176	39.8	304	13 EA
150 x 150 x 19 EA	19.0	42.1	19.0	5.0	6.89	5360	44.2	106	17.6	106	166	265	57.2	4.60	54.9	83.8	62.6	73.5	135	29.3	657	150 x 150 x 19 EA
16 EA	15.8	35.4	15.8	5.0	8.49	4520	43.0	107	15.1	106	142	225	57.8	3.91	54.3	71.9	60.8	64.2	115	29.4	386	16 EA
12 EA	12.0	27.3	12.0	5.0	11.5	3480	41.5	108	11.9	106	112	175	58.4	3.06	53.7	56.9	52.1	89.3	89.3	29.6	174	12 EA
10 EA	9.5	21.9	9.5	5.0	14.8	2790	40.5	109	9.61	106	90.6	141	58.7	2.48	53.4	46.4	57.3	43.3	72.0	29.8	88.9	10 EA
125 x 125 x 16 EA	29.1	15.8	15.8	5.0	6.91	3710	36.8	88.2	8.43	88.4	95.4	153	47.7	2.20	45.4	48.5	52.1	42.3	77.8	24.4	313	125 x 125 x 16 EA
12 EA	22.5	12.0	12.0	5.0	9.42	2870	35.4	89.6	6.69	88.4	75.7	120	48.3	1.73	44.7	38.6	50.1	34.5	60.8	24.5	141	12 EA
10 EA	18.0	9.5	10.0	5.0	12.2	2300	34.4	90.6	5.44	88.4	61.6	96.5	48.7	1.40	44.4	31.5	48.7	28.8	49.0	24.7	71.9	10 EA
8 EA	14.9	7.8	10.0	5.0	15.0	1900	33.7	91.3	4.55	88.4	45.5	80.2	48.5	1.17	44.2	26.5	47.7	24.5	40.8	24.8	40.6	8 EA
100 x 100 x 12 EA	17.7	12.0	12.0	5.0	7.33	2260	29.2	70.8	3.29	70.7	46.6	74.5	38.2	0.857	35.8	23.9	41.3	20.8	37.9	19.5	110	100 x 100 x 12 EA
10 EA	14.2	9.5	10.0	5.0	9.53	1810	28.2	71.8	2.70	70.7	38.2	60.4	38.6	0.695	35.4	19.6	39.9	17.4	30.7	19.6	56.2	10 EA
8 EA	11.8	7.8	8.0	5.0	11.8	1500	27.5	72.5	2.27	70.7	32.0	50.3	38.8	0.582	35.2	16.5	38.9	14.9	25.6	19.7	31.7	8 EA
6 EA	9.6	6.0	6.0	5.0	15.7	1170	26.8	73.2	1.78	70.7	25.2	39.3	39.1	0.458	35.0	13.1	37.9	12.1	20.0	19.8	14.8	6 EA
90 x 90 x 10 EA	12.7	9.5	8.0	5.0	8.47	1620	25.7	64.3	1.93	63.6	30.4	48.3	34.5	0.500	31.9	15.7	36.4	13.8	24.6	17.6	50.5	90 x 90 x 10 EA
8 EA	10.6	7.8	8.0	5.0	10.5	1350	25.0	65.0	1.63	63.6	25.6	40.4	34.8	0.419	31.7	13.2	35.4	11.8	20.5	17.6	28.6	8 EA
6 EA	8.22	6.0	6.0	5.0	14.0	1050	24.3	65.7	1.28	63.6	20.1	31.6	35.0	0.330	31.5	10.5	34.3	9.62	16.1	17.8	13.4	6 EA
75 x 75 x 10 EA	9.5	8.0	5.0	5.0	6.89	1340	22.0	53.0	1.08	53.0	20.4	32.8	28.4	0.282	26.6	10.6	31.1	9.09	16.8	14.5	41.9	75 x 75 x 10 EA
8 EA	8.73	7.8	8.0	5.0	8.62	1110	21.3	53.7	0.913	53.0	17.2	27.5	27.7	0.237	26.4	8.99	30.1	7.87	14.0	14.6	23.8	8 EA
6 EA	6.81	6.0	6.0	5.0	11.5	867	20.5	54.5	0.722	53.0	13.6	21.6	28.9	0.187	26.2	7.15	29.0	6.44	11.0	14.7	11.2	6 EA
5 EA	5.27	4.6	6.0	5.0	15.3	672	19.9	57.2	0.563	53.0	10.6	16.7	29.0	0.147	26.1	5.62	28.1	5.22	8.61	14.8	5.28	5 EA
65 x 65 x 10 EA	9.02	9.5	6.0	3.0	5.84	1150	19.6	45.4	0.691	46.0	15.0	24.3	24.5	0.183	23.7	7.71	27.7	6.60	12.5	12.6	35.1	65 x 65 x 10 EA
8 EA	7.51	7.8	6.0	3.0	7.33	957	19.0	46.0	0.589	46.0	12.8	20.5	24.8	0.154	23.4	6.56	26.8	5.73	10.5	12.7	20.0	8 EA
6 EA	5.87	6.0	6.0	3.0	9.83	748	18.3	46.7	0.471	46.0	10.2	16.2	25.1	0.122	23.1	5.26	25.8	4.71	8.25	12.8	9.37	6 EA
5 EA	4.56	4.6	6.0	3.0	13.1	581	17.7	47.3	0.371	46.0	8.08	12.7	25.3	0.0959	23.0	4.18	25.0	3.83	6.46	12.9	4.36	5 EA
55 x 55 x 6 EA	4.93	6.0	6.0	3.0	8.17	628	15.8	39.2	0.278	38.9	7.14	11.4	21.0	0.0723	19.6	3.69	22.3	3.24	5.82	10.7	7.93	55 x 55 x 6 EA
5 EA	3.84	4.6	6.0	3.0	11.0	489	15.2	39.8	0.220	38.9	5.66	8.93	21.2	0.0571	19.4	2.94	21.5	2.66	4.57	10.8	3.71	5 EA
50 x 50 x 8 EA	5.68	7.8	6.0	3.0	5.41	723	15.2	34.8	0.253	35.4	7.16	11.7	18.7	0.0675	18.1	3.73	21.5	3.14	6.00	9.66	15.2	50 x 50 x 8 EA
6 EA	4.46	6.0	6.0	3.0	7.33	568	14.5	35.5	0.205	35.4	5.79	9.30	19.0	0.0536	17.8	3.01	20.5	2.61	4.76	9.71	7.21	6 EA
5 EA	3.48	4.6	6.0	3.0	9.87	443	13.9	36.1	0.163	35.4	4.61	7.32	19.2	0.0424	17.6	2.40	19.7	2.15	3.75	9.78	3.38	5 EA
3 EA	2.31	3.0	6.0	3.0	15.7	295	13.2	36.8	0.110	35.4	3.11	4.90	19.3	0.0289	17.6	1.65	18.7	1.55	2.53	9.90	1.01	3 EA
45 x 45 x 6 EA	3.97	6.0	6.0	3.0	6.50	506	13.3	31.7	0.146	31.8	4.59	7.41	17.0	0.0383	16.0	2.39	18.8	2.04	3.79	8.71	6.32	45 x 45 x 6 EA
5 EA	3.10	4.6	6.0	3.0	8.78	394	12.7	32.3	0.117	31.8	3.66	5.84	17.2	0.0303	15.8	1.91	18.0	1.68	2.99	8.76	2.96	5 EA
3 EA	2.06	3.0	6.0	3.0	14.0	263	12.0	33.0	0.0790	31.8	2.48	3.92	17.3	0.0206	15.7	1.31	17.0	1.21	2.02	8.85	0.875	3 EA
40 x 40 x 6 EA	3.50	6.0	6.0	3.0	5.67	446	12.0	28.0	0.0997	28.3	3.53	5.75	15.0	0.0265	14.3	1.86	17.0	1.55	2.95	7.71	5.60	40 x 40 x 6 EA
5 EA	2.73	4.6	6.0	3.0	7.70	348	11.5	28.5	0.0801	28.3	2.83	4.55	15.2	0.0209	14.0	1.49	16.2	1.29	2.33	7.75	2.63	5 EA
3 EA	1.83	3.0	6.0	3.0	12.3	233	10.8	29.2	0.0545	28.3	1.93	3.06	15.3	0.0142	13.9	1.02	15.3	0.950	1.58	7.82	0.785	3 EA
30 x 30 x 6 EA	2.56	6.0	6.0	3.0	4.00	326	9.53	20.5	0.0387	21.2	1.83	3.06	10.9	0.0107	10.7	0.993	13.5	0.790	1.59	5.72	4.16	30 x 30 x 6 EA
5 EA	2.01	4.6	6.0	3.0	5.52	256	8.99	21.0	0.0316	21.2	1.49	2.45	11.1	0.00839	10.5	0.799	12.7	0.660	1.26	5.72	1.98	5 EA
3 EA	1.35	3.0	6.0	3.0	9.00	173	8.30	21.7	0.0218	21.2	1.03	1.67	11.2	0.00573	10.3	0.554	11.7	0.488	0.862	5.76	0.605	3 EA
25 x 25 x 6 EA	2.08	6.0	6.0	3.0	3.17	266	8.28	16.7	0.0210	17.7	1.19	2.03	8.89	0.00600	8.97	0.669	11.7	0.513	1.07	4.75	3.44	25 x 25 x 6 EA
5 EA	1.65	4.6	6.0	3.0	4.43	210	7.75	17.3	0.0173	17.7	0.980	1.65	9.07	0.00469	8.73	0.537	11.0	0.428	0.849	4.72	1.66	5 EA
3 EA	1.12	3.0	6.0	3.0	7.33	143	7.07	17.9	0.0121	17.7	0.685	1.13	9.22	0.00319	8.56	0.373	9.99	0.319	0.583	4.73	0.515	3 EA



Equal Angles

Table 24 Equal Angles - x-axis and y-axis - Properties for Assessing Section Capacity

Designation mm mm mm	Yield Stress			Form Factor			About x-axis			About y-axis			Designation
	f_y MPa	k_f	Z_{ox} 10^3mm^3	Load A or C	Load B	Load D	f_y MPa	k_f	Z_{ox} 10^3mm^3	Load A or C	Load B	Load D	
300PLUS® *													
200 x 200 x 26 EA	280	1.00	602	267	267	267	340	1.00	602	267	267	267	200 x 200 x 26 EA
20 EA	280	1.00	479	220	220	220	340	1.00	469	214	214	214	20 EA
18 EA	280	1.00	427	204	204	204	340	1.00	417	192	192	192	18 EA
16 EA	300	1.00	369	172	186	186	340	1.00	362	169	186	186	16 EA
13 EA	300	1.00	285	136	158	158	340	0.956	278	132	158	158	13 EA
150 x 150 x 19 EA	280	1.00	248	110	110	110	340	1.00	248	110	110	110	150 x 150 x 19 EA
16 EA	300	1.00	212	95.7	96.3	96.3	340	1.00	209	94.5	96.3	96.3	16 EA
12 EA	300	1.00	155	72.3	78.1	78.1	340	1.00	152	70.9	78.1	78.1	12 EA
10 EA	320	0.958	114	54.5	64.9	64.9	360	0.906	111	53.1	64.9	64.9	10 EA
125 x 125 x 16 EA	300	1.00	143	63.4	63.4	63.4	340	1.00	143	63.4	63.4	63.4	125 x 125 x 16 EA
12 EA	300	1.00	110	50.3	51.7	51.7	340	1.00	109	49.6	51.7	51.7	12 EA
10 EA	320	1.00	83.2	38.9	43.1	43.1	360	1.00	81.6	38.1	43.1	43.1	10 EA
8 EA	320	0.943	64.3	30.7	36.8	36.8	360	0.892	62.7	29.9	36.8	36.8	8 EA
100 x 100 x 12 EA	300	1.00	69.9	31.1	31.1	31.1	340	1.00	69.9	31.1	31.1	31.1	100 x 100 x 12 EA
10 EA	320	1.00	55.1	25.2	26.1	26.1	360	1.00	54.4	24.8	26.1	26.1	10 EA
8 EA	320	1.00	43.7	20.4	22.4	22.4	360	1.00	42.9	20.0	22.4	22.4	8 EA
6 EA	320	0.906	30.9	14.8	18.1	18.1	360	0.856	30.0	14.4	18.1	18.1	6 EA
90 x 90 x 10 EA	320	1.00	45.0	20.4	20.6	20.6	360	1.00	44.5	20.1	20.6	20.6	90 x 90 x 10 EA
8 EA	320	1.00	36.0	17.8	17.8	17.8	360	1.00	35.4	16.4	17.8	17.8	8 EA
6 EA	320	1.00	25.9	12.4	14.4	14.4	360	0.954	25.3	12.1	14.4	14.4	6 EA
75 x 75 x 10 EA	320	1.00	30.5	13.6	13.6	13.6	360	1.00	30.5	13.6	13.6	13.6	75 x 75 x 10 EA
8 EA	320	1.00	25.4	11.6	11.8	11.8	360	1.00	25.1	11.5	11.8	11.8	8 EA
6 EA	320	1.00	18.7	8.85	9.66	9.66	360	1.00	18.4	8.70	9.66	9.66	6 EA
5 EA	320	0.927	13.2	6.47	7.82	7.82	360	0.876	12.8	6.30	7.82	7.82	5 EA
65 x 65 x 10 EA	320	1.00	22.5	9.90	9.90	9.90	360	1.00	22.5	9.90	9.90	9.90	65 x 65 x 10 EA
8 EA	320	1.00	19.2	8.59	8.59	8.59	360	1.00	19.2	8.59	8.59	8.59	8 EA
6 EA	320	1.00	14.7	6.76	7.07	7.07	360	1.00	14.5	6.66	7.07	7.07	6 EA
5 EA	320	1.00	10.6	5.05	5.75	5.75	360	1.00	10.4	4.94	5.75	5.75	5 EA
55 x 55 x 6 EA	320	1.00	10.7	4.84	4.86	4.86	360	1.00	10.5	4.78	4.86	4.86	55 x 55 x 6 EA
5 EA	320	1.00	7.88	3.70	3.98	3.98	360	1.00	7.75	3.64	3.98	3.98	5 EA
50 x 50 x 8 EA	320	1.00	10.7	4.71	4.71	4.71	360	1.00	10.7	4.71	4.71	4.71	50 x 50 x 8 EA
6 EA	320	1.00	8.69	3.92	3.92	3.92	360	1.00	8.69	3.92	3.92	3.92	6 EA
5 EA	320	1.00	6.60	3.08	3.22	3.22	360	1.00	6.50	3.03	3.22	3.22	5 EA
3 EA	320	0.907	3.82	1.90	2.32	2.32	360	0.858	3.71	1.85	2.32	2.32	3 EA
45 x 45 x 6 EA	320	1.00	6.88	3.06	3.06	3.06	360	1.00	6.88	3.06	3.06	3.06	45 x 45 x 6 EA
5 EA	320	1.00	5.39	2.47	2.52	2.52	360	1.00	5.32	2.44	2.52	2.52	5 EA
3 EA	320	1.00	3.19	1.55	1.81	1.81	360	0.954	3.12	1.52	1.81	1.81	3 EA
40 x 40 x 6 EA	320	1.00	5.29	2.33	2.33	2.33	360	1.00	5.29	2.33	2.33	2.33	40 x 40 x 6 EA
5 EA	320	1.00	4.25	1.93	1.93	1.93	360	1.00	4.22	1.92	1.93	1.93	5 EA
3 EA	320	1.00	2.59	1.25	1.40	1.40	360	1.00	2.54	1.23	1.40	1.40	3 EA
30 x 30 x 6 EA	320	1.00	1.19	0.74	0.74	0.74	360	1.00	1.19	0.74	0.74	0.74	30 x 30 x 6 EA
5 EA	320	1.00	2.23	0.990	0.990	0.990	360	1.00	2.23	0.990	0.990	0.990	5 EA
3 EA	320	1.00	1.50	0.714	0.732	0.732	360	1.00	1.48	0.705	0.732	0.732	3 EA
25 x 25 x 6 EA	320	1.00	1.78	0.769	0.769	0.769	360	1.00	1.78	0.769	0.769	0.769	25 x 25 x 6 EA
5 EA	320	1.00	1.47	0.642	0.642	0.642	360	1.00	1.47	0.642	0.642	0.642	5 EA
3 EA	320	1.00	1.03	0.479	0.479	0.479	360	1.00	1.03	0.479	0.479	0.479	3 EA


Notes

1. For 300PLUS® sections the tensile strength (f_u) is 440 MPa.
2. For Grade 350 sections the tensile strength (f_u) is 480 MPa.

* 300PLUS® replaced Grade 250 as the base grade for 125 x 125 x 8 equal angles and larger in 1994.

300PLUS® replaced Grade 250 as the base grade for 100 x 100 x 12 equal angles and smaller in 1997.



300PLUS® hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:1-300.



Equal Angles

Table 25 Equal Angles - n-axis and p-axis - Properties

Designation	About n-axis and p-axis										Product of 2nd Moment of Area	Designation
	mm	mm	I_{n-p} 10^6mm^4	I_{n-p} mm	Z_{n-p} 10^3mm^3	Z_{n-p} mm	S_{n-p} 10^3mm^3	S_{n-p} mm	r_{n-p} mm	r_{n-p} 10^3mm^4		
200 x 200 x 26 EA	35.8	59.3	605	141	295	460	60.5	-20.9	200 x 200 x 26 EA			
20 EA	28.8	57.0	505	143	201	363	16.9	20 EA				
18 EA	26.3	56.2	467	144	183	330	15.5	18 EA				
16 EA	23.7	55.4	427	145	164	296	14.0	16 EA				
13 EA	19.7	54.2	363	146	135	243	11.6	13 EA				
150 x 150 x 19 EA	11.1	44.2	250	106	105	189	45.4	-6.48	150 x 150 x 19 EA			
16 EA	9.48	43.0	220	107	88.7	160	45.8	-5.58	16 EA			
12 EA	7.46	41.5	180	108	68.8	124	46.3	-4.40	12 EA			
10 EA	6.04	40.5	149	109	55.2	99.9	46.6	-3.56	10 EA			
125 x 125 x 16 EA	5.32	36.8	144	88.2	60.3	109	37.9	-3.11	125 x 125 x 16 EA			
12 EA	4.21	35.4	119	89.6	47.0	85.0	38.3	-2.48	12 EA			
10 EA	3.42	34.4	99.4	90.6	37.8	68.4	38.6	-2.02	10 EA			
8 EA	2.86	33.7	84.9	91.3	31.3	56.8	38.8	-1.69	8 EA			
100 x 100 x 12 EA	2.08	29.2	71.1	70.8	29.3	53.2	30.3	-1.22	100 x 100 x 12 EA			
10 EA	1.70	28.2	60.1	71.8	23.6	42.9	30.6	-1.00	10 EA			
8 EA	1.42	27.5	51.7	72.5	19.6	35.7	30.8	-0.842	8 EA			
6 EA	1.12	26.8	41.8	73.2	15.3	27.8	31.0	-0.661	6 EA			
90 x 90 x 10 EA	1.22	25.7	47.3	64.3	18.9	34.4	27.4	-0.716	90 x 90 x 10 EA			
8 EA	1.02	25.0	40.9	65.0	15.7	28.7	27.6	-0.604	8 EA			
6 EA	0.805	24.3	33.2	65.7	12.3	22.4	27.7	-0.475	6 EA			
75 x 75 x 10 EA	0.681	22.0	31.0	53.0	12.8	23.4	22.6	-0.399	75 x 75 x 10 EA			
8 EA	0.575	21.3	27.0	53.7	10.7	19.6	22.7	-0.338	8 EA			
6 EA	0.455	20.5	22.1	54.5	8.35	15.3	22.9	-0.268	6 EA			
5 EA	0.355	19.9	17.9	55.1	6.44	11.8	23.0	-0.208	5 EA			
65 x 65 x 10 EA	0.437	19.6	22.3	45.4	9.62	17.4	19.5	-0.254	65 x 65 x 10 EA			
8 EA	0.371	19.0	19.6	46.0	8.07	14.6	19.7	-0.218	8 EA			
6 EA	0.296	18.3	16.2	46.7	6.34	11.5	19.9	-0.175	6 EA			
5 EA	0.234	17.7	13.2	47.3	4.94	8.97	20.1	-0.138	5 EA			
55 x 55 x 6 EA	0.175	15.8	11.1	39.2	4.46	8.11	16.7	-0.103	55 x 55 x 6 EA			
5 EA	0.139	15.2	9.12	39.8	3.48	6.34	16.8	-0.0814	5 EA			
50 x 50 x 8 EA	0.160	15.2	10.5	34.8	4.61	8.38	14.9	-0.0928	50 x 50 x 8 EA			
6 EA	0.129	14.5	8.90	35.5	3.64	6.63	15.1	-0.0756	6 EA			
5 EA	0.103	13.9	7.36	36.1	2.85	5.19	15.2	-0.0602	5 EA			
3 EA	0.0694	13.2	5.25	36.8	1.89	3.46	15.3	-0.0405	3 EA			
45 x 45 x 6 EA	0.0922	13.3	6.93	31.7	2.91	5.30	13.5	-0.0538	45 x 45 x 6 EA			
5 EA	0.0734	12.7	5.76	32.3	2.28	4.16	13.6	-0.0432	5 EA			
3 EA	0.0498	12.0	4.14	33.0	1.51	2.77	13.8	-0.0292	3 EA			
40 x 40 x 6 EA	0.0631	12.0	5.24	28.0	2.26	4.12	11.9	-0.0366	40 x 40 x 6 EA			
5 EA	0.0505	11.5	4.39	28.5	1.77	3.24	12.0	-0.0296	5 EA			
3 EA	0.0344	10.8	3.19	29.2	1.18	2.17	12.2	-0.0201	3 EA			
30 x 30 x 6 EA	0.0247	9.53	2.59	20.5	1.21	2.22	8.71	-0.0140	30 x 30 x 6 EA			
5 EA	0.0200	8.99	2.22	21.0	0.951	1.76	8.83	-0.0116	5 EA			
3 EA	0.0138	8.30	1.66	21.7	0.635	1.18	8.93	-0.00804	3 EA			
25 x 25 x 6 EA	0.0135	8.28	1.63	16.7	0.807	1.49	7.13	-0.00750	25 x 25 x 6 EA			
5 EA	0.0110	7.75	1.42	17.3	0.638	1.19	7.23	-0.00632	5 EA			
3 EA	0.00765	7.07	1.08	17.9	0.426	0.802	7.33	-0.00446	3 EA			



Unequal Angles


Table 27 Unequal Angles - x-axis and y-axis - Properties for Assessing Section Capacity

Designation	Yield Stress		Form Factor		About x-axis		About y-axis		Yield Stress		Form Factor		About x-axis		About y-axis		Designation	
	f_y	MPa	k_t		Load A	Load C	Load B	Load D	f_y	MPa	k_t		Load A	Load C	Load B	Load D		
mm mm mm					Z_{ex}	Z_{ey}	Z_{ex}	Z_{ey}	Z_{ex}	Z_{ey}	Z_{ex}	Z_{ey}	Z_{ex}	Z_{ey}	Z_{ex}	Z_{ey}		
300PLUS* *																		
150 x 100 x 12 UA	300	1.00			102	110	35.3	38.2	100	110	1.00			100	110	34.7	38.2	150 x 100 x 12 UA
10 UA	320	0.975			74.8	81.7	26.0	30.9	0.943				73.0	78.9	25.3	30.9	10 UA	
150 x 90 x 16 UA	300	1.00			132	133	39.5	39.8	1.00				130	133	39.0	39.8	150 x 90 x 16 UA	
12 UA	300	1.00			96.3	104	28.8	31.1	1.00				94.6	104	28.3	31.1	12 UA	
10 UA	320	0.973			70.6	81.8	21.2	25.2	0.940				68.8	79.5	20.6	25.2	10 UA	
8 UA	320	0.863			53.1	60.3	15.9	21.0	0.836				51.2	57.9	15.4	21.0	8 UA	
125 x 75 x 12 UA	300	1.00			68.6	70.5	20.6	21.2	1.00				67.6	70.5	20.3	21.2	125 x 75 x 12 UA	
10 UA	320	1.00			51.6	57.2	15.5	17.2	1.00				50.6	57.2	15.2	17.2	10 UA	
8 UA	320	0.964			39.8	46.0	11.9	14.3	0.931				38.8	44.7	11.6	14.3	8 UA	
6 UA	320	0.824			26.8	30.1	8.07	11.2	0.799				25.8	28.7	7.75	11.2	6 UA	
100 x 75 x 10 UA	320	1.00			39.4	40.9	15.9	16.6	1.00				38.8	40.9	15.7	16.6	100 x 75 x 10 UA	
8 UA	320	1.00			31.2	33.1	12.6	13.9	1.00				30.6	32.1	12.4	13.9	8 UA	
6 UA	320	0.946			22.0	21.8	8.93	10.9	0.917				21.4	20.7	8.68	10.9	6 UA	
75 x 50 x 8 UA	320	1.00			17.0	17.3	5.93	6.02	1.00				16.8	17.3	5.85	6.02	75 x 50 x 8 UA	
6 UA	320	1.00			12.6	13.7	4.37	4.77	1.00				12.4	13.7	4.30	4.77	6 UA	
5 UA	320	0.956			8.89	9.65	3.10	3.75	0.926				8.66	9.30	3.02	3.75	5 UA	
65 x 50 x 8 UA	320	1.00			14.1	14.1	5.86	5.86	1.00				14.1	14.1	5.86	5.86	65 x 50 x 8 UA	
6 UA	320	1.00			10.7	11.2	4.46	4.67	1.00				10.6	11.2	4.40	4.67	6 UA	
5 UA	320	1.00			7.76	7.92	3.23	3.68	1.00				7.59	7.64	3.17	3.68	5 UA	

* 300PLUS[®] replaced Grade 250 as the base grade for 150 x 90 x 8 unequal angles and larger in 1994.
 300PLUS[®] replaced Grade 250 as the base grade for 125 x 75 x 12 unequal angles and smaller in 1997.
 300PLUS[®] hot rolled sections are produced to exceed the minimum requirements of AS/NZS 3679:300.

Notes



1. For 300PLUS[®] sections the tensile strength (fu) is 440 MPa.
2. For Grade 350 sections the tensile strength (fu) is 480 MPa.



Unequal Angles

Table 28 Unequal Angles - n-axis and p-axis - Dimensions and Properties

Designation	About n-axis						About p-axis						Product of 2nd Moment of Area I_{np}	Designation	
	I_n	P_b	Z_{nb}	P_l	Z_{nl}	S_n	r_n	I_p	η_L	Z_{pL}	η_R	Z_{pR}			S_p
mm mm	10^6mm^4	mm	10^3mm^3	mm	10^3mm^3	10^3mm^3	mm	10^6mm^4	mm	mm	10^3mm^3	10^3mm^3	10^3mm^3	mm	10^6mm^4
150 x 100 x 12 UA 10 UA	6.52 5.29	491 481	133 110	101 102	64.6 51.9	117 94.0	47.7 48.0	2.34 1.91	24.3 23.3	75.7 76.7	30.9 24.9	56.0 44.7	28.6 28.8	-2.27 -1.85	150 x 100 x 12 UA 10 UA
150 x 90 x 16 UA 12 UA	7.97 6.29	52.5 51.0	152 123	97.5 99.0	81.7 63.5	145 114	47.4 47.8	2.15 1.72	22.7 21.2	67.3 68.8	32.0 25.0	59.5 45.7	24.6 25.0	-2.35 -1.89	150 x 90 x 16 UA 12 UA
10 UA	5.10	50.0	102	100	51.0	91.5	48.2	1.41	20.2	69.8	20.2	36.5	25.3	-1.54	10 UA
8 UA	4.26	49.2	86.6	101	42.3	76.0	48.4	1.18	19.6	70.4	16.8	30.1	25.5	-1.29	8 UA
125 x 75 x 12 UA 10 UA	3.54 2.88	43.3 42.3	81.8 68.2	81.7 82.7	43.3 34.9	77.3 62.5	39.6 39.9	0.958 0.789	18.4 17.5	56.6 57.5	16.9 13.7	31.4 25.1	20.6 20.9	-1.05 -0.867	125 x 75 x 12 UA 10 UA
8 UA	2.41	41.5	58.1	83.5	28.9	52.0	40.1	0.664	16.8	58.2	11.4	20.7	21.0	-0.731	8 UA
6 UA	1.89	40.7	46.5	84.3	22.5	40.6	40.3	0.524	16.0	59.0	8.89	16.0	21.2	-0.575	6 UA
100 x 75 x 10 UA 8 UA	1.55 1.30	31.8 31.1	48.6 41.8	68.2 68.9	22.6 18.8	41.3 34.4	31.3 31.5	0.743 0.626	19.4 18.7	55.6 56.3	13.4 11.1	24.3 20.2	21.7 21.9	-0.625 -0.528	100 x 75 x 10 UA 8 UA
6 UA	1.02	30.3	33.7	69.7	14.6	26.9	31.7	0.494	17.9	57.1	8.67	15.7	22.0	-0.416	6 UA
75 x 50 x 8 UA 6 UA	0.511 0.407	25.2 24.4	20.3 16.7	49.8 50.6	10.3 8.05	18.5 14.6	23.6 23.8	0.181 0.145	12.8 12.1	37.2 37.9	4.86 3.84	8.96 6.98	14.0 14.2	-0.174 -0.140	75 x 50 x 8 UA 6 UA
5 UA	0.321	23.8	13.5	51.2	6.27	11.4	23.9	0.115	11.5	38.5	3.00	5.41	14.3	-0.111	5 UA
65 x 50 x 8 UA 6 UA	0.341 0.272	21.1 20.4	16.2 13.4	43.9 44.6	7.75 6.10	14.1 11.1	20.1 20.3	0.174 0.140	13.6 12.9	36.4 37.1	4.78 3.77	8.74 6.85	14.4 14.6	-0.141 -0.114	65 x 50 x 8 UA 6 UA
5 UA	0.215	19.8	10.9	45.2	4.75	8.70	20.5	0.111	12.4	37.6	2.95	5.32	14.7	-0.0903	5 UA



Structural Steel Sections

Structural Steel - Welded Sections - Standard: AS/NZS 3679.2:1996

Table 29 Chemical Composition - Welded Sections Base Plate

Grade (1)	Cast or Product Analysis, Percent												Micro-alloying Elements	CE (4)
	C	Si	Mn	P	S	Cr (2)	Ni (2)	Cu (2)	Mo (2)	Al (3)	Ti			
AS/NZS 3678	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
300 & 300L15	0.22	0.55	1.70	0.040	0.030	0.30	0.50	0.40	0.10	0.100	0.040	(see Note 5)	0.44	
400 & 400L15	0.22	0.55	1.70	0.040	0.030	0.30	0.50	0.40	0.35	0.100	0.040	(see Note 6)	0.48	

Notes

1. The use of sulphide modification steelmaking techniques for listed grades is permitted.
2. Cr + Ni + Cu + Mo = 1.00% maximum apply.
3. Limits specified are for both acid soluble and total aluminium.
4. Carbon equivalent (CE) is calculated from the equation based on actual cast or product analysis:

$$CE = C + \frac{Mn}{6} + \frac{Cr}{5} + \frac{Mo}{5} + \frac{V}{15} + \frac{Ni}{15} + \frac{Cu}{15}$$
5. Niobium plus vanadium: 0.030% maximum.
6. Vanadium: 0.10% maximum. Niobium plus vanadium plus titanium: 0.15% maximum.

Table 30 Tensile Properties - Welded Sections Base Plate

Property	Grade - AS/NZS 3678	
	300, 300L15	400, 400L15
Minimum Yield Strength - MPa for thickness of:		
> 8 ≤ 12	310	400
> 12 ≤ 20	300	380
> 20 ≤ 50	280	360
Minimum Tensile Strength - MPa	430	480
Minimum Elongation % of Gauge Length of $5.65\sqrt{S_0}$	21	18

Note

1. S_0 is the cross-sectional area of the test piece before testing.

Table 31 Charpy V-Notch Impact Test Requirements - Welded Sections Base Plate

Grade	Test Temperature	Minimum Absorbed Energy, J					
		10mm x 10mm		10mm x 7.5mm		10mm x 5mm	
AS/NZS 3678	°C	Average of 3 Tests	Individual Test	Average of 3 Tests	Individual Test	Average of 3 Tests	Individual Test
300L15	-15	27	20	22	16	18	13
400L15	-15	27	20	22	16	18	13

STANDARD SPECIFICATIONS

Structural Steel - Hot Rolled Bars and Sections - Standard: AS/NZS 3679.1:1996

Table 32 Chemical Composition - Bars and Sections

Grade (see Note 1)	Cast analysis (max.) (See Notes 2 and 3)						
	%						
	C	Si	Mn	P	S	Micro-alloying elements (see Note 4)	CE (see Note 5)
300PLUS®, 300PLUSLO, 300PLUS®SO	0.25	0.50	1.60	0.040	0.040	(see Note 6)	0.44
350, 350LO	0.22	0.50	1.60	0.040	0.040	(see Note 7)	0.45

- Notes**
- The use of sulfide modification steel making techniques for these grades is permitted.
 - Grain refining elements, i.e. aluminium and titanium, may be added, provided that the total content does not exceed 0.15%. Limits are for total or soluble aluminium.
 - The following elements may be present to the limits stated, subject to a maximum total of 1.00%:

(a) Copper	0.50%
(b) Nickel	0.50%
(c) Chromium	0.30%
(d) Molybdenum	0.10%
 - For grade 300PLUS, the following are not considered as micro-alloying elements:

(a) Titanium	0.040% maximum
(b) Niobium	0.020% maximum
(c) Vanadium	0.030% maximum
(d) Niobium plus vanadium	0.030% maximum
 - Carbon equivalent (CE) is calculated from the following equation:

$$CE = C + \frac{Mn}{6} + \frac{Cr}{5} + \frac{Mo}{5} + \frac{V}{15} + \frac{Ni}{15} + \frac{Cu}{15}$$
 - Micro-alloying elements are not permitted in grade 300 except for thicknesses greater than or equal to 15mm, where the following apply:
 - the maximum combined micro-alloying element content is 0.15%
 - where micro-alloying elements are used, the percentage of each element is to be shown on certificates.
 - For grade 350, micro-alloying elements niobium, vanadium and titanium may be added, provided that their total combined content does not exceed 0.15%.

Table 33 Tensile Properties - Flat Bars and Sections

Grade	Minimum yield stress, MPa			Minimum tensile strength, MPa	Minimum elongation on a gauge length of 5.65√S ₀ (see Note 2) %
	Thickness, mm (see Note 1)				
	< 11	≥ 11 to ≤ 17	> 17 to < 40		
300PLUS®, 300PLUSLO	320	300	280	440	22
300PLUS®SO	NA	300	280	440	25
350	360	340	340	480	20

Table 34 Tensile Properties - Round and Square Bars

Grade	Minimum yield stress, MPa			Minimum tensile strength, MPa	Minimum elongation on a gauge length of 5.65√S ₀ %
	Thickness, mm				
	≤ 50	> 50 to < 100	≥ 100		
300PLUS®	300	290	280	440	22
350	340	330	320	480	20

Notes (apply to tables 33 and 34)

- For a section, the term 'thickness' refers to the nominal thickness of the part from which the sample is taken.
- S₀ is the cross-sectional area of the test piece before testing.
- For precise details of properties reference should be made to the latest edition of AS/NZS 3679.1:1996 or the latest OneSteel specification.
- 300PLUS® steel is produced to exceed the latest requirements for grade 300 in AS/NZS 3679.1.

Table 35 Charpy V-Notch Impact Test Requirements - Bars and Sections

Grade	Test Temperature °C	Minimum Absorbed Energy, J Size of Test Piece					
		10mm x 10mm		10mm x 7.5mm		10mm x 5mm	
		Average of 3 Tests	Individual Test	Average of 3 Tests	Individual Test	Average of 3 Tests	Individual Test
300PLUSLO, 350LO*	0	27	20	22	16	18	13
300PLUS®SO	0	70	50	NA	NA	NA	NA

Notes

- This does not cover impact tested grades for thickness less than 8mm.
 *Impact testing is not available for bars and is only available for some sections by enquiry.

Merchant Bar Sections

Table 36 Chemical Composition - For OneSteel Merchant Bar Sections - Regular Grades - AS 1442

Steel Type	Grade	C		Si		Mn		P		S	
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Carbon and Carbon Manganese Steels	1016	0.13	0.18	0.10	0.35	0.60	0.90	*	0.040	*	0.040
	1022	0.18	0.23	0.10	0.35	0.70	1.00	*	0.040	*	0.040
	1045	0.43	0.50	0.10	0.35	0.60	0.90	*	0.040	*	0.040

Table 37 Chemical Composition - For OneSteel Merchant Bar Sections - Regular Grades - AS 1447

Steel Type	Grade	C		Si		Mn		P		S		Cr	
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Spring Steels	5160	0.55	0.65	0.10	0.35	0.70	1.00	*	0.040	*	0.040	0.70	0.90
	9258	0.50	0.65	1.60	2.20	0.70	1.05	*	0.040	*	0.040	*	*
	9261	0.55	0.65	1.80	2.20	0.70	1.00	*	0.040	*	0.040	0.10	0.25

Note

1. Merchant Bar Sections are also available in AS/NZS 3679.1:1996 specification. See Tables 32 to 35. Other grades may be available on enquiry.

Table 38 OneSteel Grades

Steel Type	Grade	C		Si		Mn		P		S		Cr		V	
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
OneSteel	1015	0.13	0.18	0.10	0.35	0.30	0.60	*	0.040	*	0.050	*	*	*	*
	X4K92M61S*	0.55	0.65	1.60	1.90	0.70	1.00	*	0.040	*	0.040	0.10	0.25	0.15	0.25

Table 39 Heat Treatment Limitations

Maximum Recommended Cross Section*			
Grade	Rounds	Squares	Flats
5160	40mm	36mm	28mm
9261	27mm	25mm	19mm
9258			16mm

* The recommendations are based on the criterion that, at the maximum dimensions, a hardness of 50 HRC can be achieved in the centre of the quenched section.

The actual properties obtained are dependent on both grade and heat treatment process control. As OneSteel has no control over the springmakers' heat treatment process, the above recommendations cannot be guaranteed. However, springmakers with efficient heat treatment facilities will be able to achieve a hardness value of 50 HRC as recommended.

CUSTOMER TECHNICAL SERVICE

OneSteel Direct - free call 1800 1 78335

All customer service enquiries for OneSteel Market Mills products described in this publication should be directed to the OneSteel Direct free call service on 1800 1 STEEL (1800 1 78335).

OneSteel Direct provides a 'one stop shop' service for customers and users of steel requiring information on OneSteel Market Mills and its products. It is staffed by a centralised team of experienced personnel specialising in Technical, Sales, Marketing and Public Affairs knowledge.

OneSteel Direct's services include the following:

- Product and application technical support incorporating a network of expert OneSteel metallurgists, engineers and scientists located throughout Australia.
- Fast brochure and technical information mailout and facsimile services.
- Immediate referral service to approved OneSteel Market Mills distributors and service providers in your area.

OneSteel Direct's services are available Mon-Fri from 8.30am to 5.30pm (AEST)

- Freecall 1800 1 STEEL (1800 1 78335)
- Freefax 1800 101 141
- E-mail onesteeldirect@onesteel.com
- International Telephone +61 2 4222 3456
- International Facsimile +61 2 4222 3434



COMPANY ADDRESSES

Head Office

OneSteel Market Mills

PO Box 245C
Newcastle NSW 2300
Telephone: (02) 4935 5555
Facsimile: (02) 4935 5490

OneSteel Market Mills Sales Offices

New South Wales

Cnr Milperra & Mons Roads, Revesby NSW 2212
PO Box 4664, Milperra NSW 1891
Tel: 1800 1 78335 Fax: (02) 9792 9094

Queensland

240 Bradman Street, Acacia Ridge QLD 4110
PO Box 300, Acacia Ridge QLD 4110
Tel: 1800 1 78335 Fax: (07) 3845 5609

South Australia & Northern Territory

519 Cross Keys Road, Cavan SA 5094
PO Box 21, Dry Creek SA 5094
Tel: 1800 1 78335 Fax: (08) 8260 9355

Victoria & Tasmania

219-229 St Albans Road, Sunshine VIC 3020
PO Box 5059, Sunshine VIC 3020
Tel: 1800 1 78335 Fax: (03) 8312 2650

Western Australia

53 Harrison Road, Forrestfield WA 6058
PO Box 611, Welshpool WA 6986
Tel: 1800 1 78335 Fax: (08) 6332 3132

New Zealand

Ground Floor, 485B Rosebank Road, Avondale, Auckland 1026 NZ
PO Box 19335, Avondale, Auckland 1746 NZ
Tel: (09) 820 4048 Fax: (09) 820 4292

Rail Sales & Marketing Office

OneSteel Whyalla Steelworks

38 Heath Street, Lonsdale SA 5160
PO Box 951 Morphett Vale SA 5162
Tel: (08) 8326 4601 Fax: (08) 8326 3461

ONESTEEL DIRECT

Freecall 1800 178 335

Website www.onesteel.com

Freefax 1800 101 141

Email onesteeldirect@onesteel.com



This publication has been prepared by OneSteel Market Mills, an operating business group of which OneSteel Manufacturing Pty Limited ABN 42 004 651 325 is a part. Please note that any specifications or technical data referred to in this publication are subject to change and/or variation or improvement without notice and no warranty as to their suitability for any use is made. Users of this publication, to ensure accuracy and adequacy for their purposes, are requested to check the information provided in this publication to satisfy themselves as to its appropriateness and not to rely on the information without first doing so. Unless required by law, the company cannot accept any responsibility for any loss, damage or consequence resulting from the use of this publication. Photographs shown are representative only of typical applications, current at January 2010. This brochure is not an offer to trade and shall not form any part of the trading terms in any transaction.

© Copyright 2003-2010 OneSteel Manufacturing Pty Limited. 300PLUS® is a registered trademark of OneSteel Manufacturing Pty Limited. LiteSteel™ is trademark of LiteSteel Technologies Pty Ltd ABN 65 113 101 054. Issue 5, February 2010 BS0184

DISTRIBUTED BY